


VICTOR REINZ

AFM 32/2

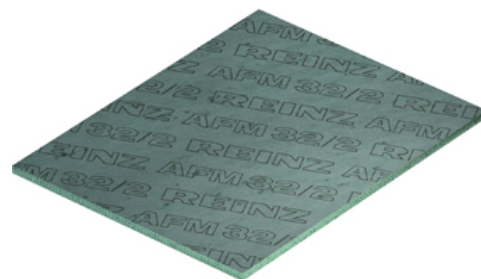

Material

It is composed of aramide fibres and other asbestos substitutes which are resistant to high temperatures. These substitutes are processed with high-grade elastomers under elevated pressure and temperature.

Properties

AFM 32/2 exhibits high mechanical and thermal stability as well as high tensile strength. It is also conformable and is particularly suitable for sealing off oils and other fluid substances.

Application

- for sealed joints in IC engines that are subject to high mechanical stress (e.g. intake manifolds, oil pans)
- for sealing transmissions, compressors, pipelines and apparatus
- for sealing engine, transmission, hydraulic, and refrigerating oils
- for sealing fuels, mixtures of water and antifreeze & corrosion inhibitors
- for sealing Freons, alkaline solutions, and solvents

Technical Data

Density	g/cm ³	1.60 - 1.80
Ignition Loss DIN 52911	%	< 40
Tensile Strength ASTM F 152 (across grain)	N/mm ²	> 15
Tensile Strength DIN 52910 (across grain)	N/mm ²	> 12
Residual Stress DIN 52913 (16h / 300 C)	N/mm ²	25
Residual Stress DIN 52913 (16h / 175 C)	N/mm ²	36
Compressibility ASTM F 36 J	%	7 - 12
Recovery ASTM F 36 J	%	> 50
Sealability against nitrogen DIN 3535/6	mg/(s*m)	< 0.01
Thickness Increase ASTM F 146 (oil IRM 903: 5 h/150 C)	%	< 8
Weight Increase ASTM F 146 (oil IRM 903: 5 h/150 C)	%	< 12
Thickness Increase ASTM F 146 (fuel B: 5 h/23 C)	%	< 7
Weight Increase ASTM F 146 (fuel B: 5 h/23 C)	%	< 10
Thickness Increase ASTM F 146 (water / antifreeze 50:50 5h/100 C)	%	< 5
Weight Increase ASTM F 146 (water / antifreeze 50:50 5h/100 C)	%	< 15
Short Term Peak Temperature	C	400
Maximum Continuous Temperature	C	250
Maximum Continuous Pressure	bar	150
Typical values for	mm	2

Form of Delivery

Gaskets according to a drawing, dimensions supplied, or other arrangement.

Sheets Size x (Standart Size) x Thickness

1500 x 1500 x 0.30 mm
 1500 x 1500 x 0.50 mm
 1500 x 1500 x 0.75 mm
 1500 x 1500 x 1.00 mm
 1500 x 1500 x 1.50 mm
 1500 x 1500 x 2.00 mm
 1500 x 1500 x 3.00 mm